

EL[®]MARK

The Brand of Electricity

ELLIS LED CEILING LAMPS

GENERAL INFORMATION »

- ∴ Nominal voltage: 180-265V AC/ 50-60Hz
- ∴ Power: 9W; 18W; 24W
- ∴ Power supply: Driver included
- ∴ Driver isolated: 180-265V
- ∴ Light source: SMD2835-MLS
- ∴ Colour temperature: 4000K
- ∴ Colour body: White
- ∴ Body material: Aluminium
- ∴ Reflector: PP
- ∴ Colour rendering index: Ra≥80
- ∴ Beam angle: 120
- ∴ Switch on/off:>10 000
- ∴ Long life: 15 000h
- ∴ Easy installation due to handy clips.
- ∴ Protection against dust and moisture: IP20
- ∴ Recessed mounted luminaire.

FEATURES »

- ∴ Completely replace traditional lighting fixtures
- ∴ It is very elegant, with a modern ultra-flat design.
- ∴ Easy to install and maintain.
- ∴ Instant start, no flickering, no humming
- ∴ Safety, low voltage operation
- ∴ Emit a very pleasant and even light with very low glare factor due to the diffusion lens
- ∴ Low power consumption
- ∴ Repeated switch-on/off does not affect the lifespan of the LED panel Environmentally friendly - do not emit mercury and lead
- ∴ No ultraviolet and infrared rays
- ∴ Resistant to shock and vibration
- ∴ Suitable for home, offices, halls, shops, hospitals



TECHNICAL SPECIFICATION SHEET


ELMARK[®]

The Brand of Electricity

PRODUCT DETAILS »

Catalogue number	Type	Watt (W)	Whole fixture lumens (lm)	Colour temp. (K)	Colour body
95ELLISLEDR9/W	ROUND	9	760	4000	White
95ELLISLEDS9/W	SQUARE	9	760	4000	White
95ELLISLEDR18/W	ROUND	18	1520	4000	White
95ELLISLEDS18/W	SQUARE	18	1520	4000	White
95ELLISLEDR24/W	ROUND	24	2280	4000	White


DIMENSIONS

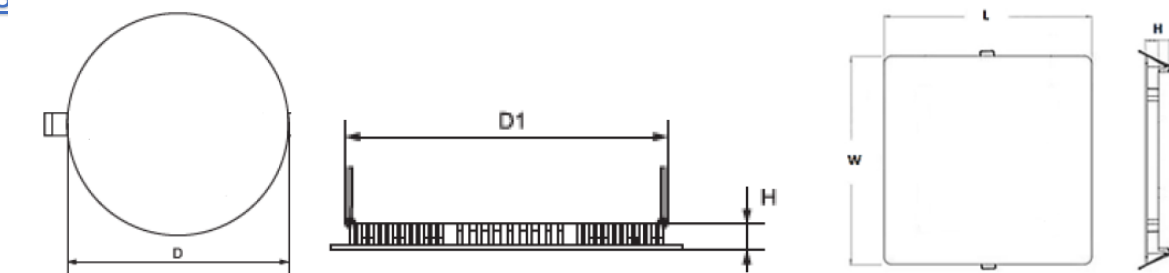

Catalogue number	Diameter/L, W (mm)	Height (mm)	Diameter1 (mm)
95ELLISLEDR9/W	100	21	55-70
95ELLISLEDS9/W	101/101	21	55-70
95ELLISLEDR18/W	119	21	55-90
95ELLISLEDS18/W	120/120	21	55-90
95ELLISLEDR24/W	168	21	55-135


ADDITIONAL INFORMATION »

stell^{ar} 95ELLISLEDR9/W
lighting solutions

 This luminaire contains built-in LED lamps.

A++ } **L**
A+ } **E**
A } **D**
~~**B**~~
~~**C**~~
~~**D**~~
~~**E**~~

The lamps cannot be changed in the luminaire.

874/2012 

Catalogue number	Barcode	Packing/Box (pcs)
95ELLISLEDR9/W	3800131235909	1/100
95ELLISLEDS9/W	3800131235930	1/100
95ELLISLEDR18/W	3800131235916	1/60
95ELLISLEDS18/W	3800131235947	1/60
95ELLISLEDR24/W	3800131235923	1/40

CE RoHS COMPLIANT 

elmarkholding.eu